

## Residual current monitor RCMA471LY

AC / DC sensitive residual current  
monitor for TN and TT systems  
(AC, DC or pulsating DC currents)



RCMA471LY

### Device features

- External measuring current transformer
- Two response values: Alarm  $I_{\Delta n1}$ : 30 / 100 / 300 mA...3 A (0...60 Hz)  
Prewarning  $I_{\Delta n2}$ : 50 % of  $I_{\Delta n1}$
- Time delay, adjustable 0...10 s (prewarning 0 / 1 s)
- Two separate alarm relays with one voltage free changeover contact each
- N/O / N/C operation, selectable
- Fault memory behaviour
- Combined test and reset button
- Connection for external test and reset button
- LED bar graph indicator  $I_{\Delta n}$  0...100 %
- Connection external measuring instrument  $I_{\Delta n}$  0...100 %
- CT connection monitoring
- Transparent dust cover for ingress protection
- Separate supply voltage
- Type B according to IEC 60755 A2

### Approvals



### Product description

The AC / DC sensitive residual current monitor RCMA471LY is designed for monitoring earthed systems (TN and TT systems), where smooth DC fault currents or residual currents continuously greater than zero can occur. These are in particular loads including six-pulse rectifiers or one way rectifiers with smoothing, such as converters, battery chargers, uninterruptible power supply systems (UPS), construction machines with frequency-controlled drives.

The prewarning stage (50 % of the set response value  $I_{\Delta n1}$ ) allows to distinguish between prewarning and alarm. The measuring values are detected using measuring current transformers, therefore the device is nearly independent of the load current and nominal voltage of the system. The device is also suitable for busbar systems.

### Application

- AC/DC sensitive residual current monitoring in earthed two, three or four conductor systems (TN and TT systems)
- AC/DC sensitive current monitoring of single conductors de-energized under normal conditions (e. g. N and PE conductors)
- Variable-speed drives
- Uninterruptible power supply systems (UPS)
- Construction site equipment

### Function

The residual current is measured using an external measuring current transformer. When the current respectively the residual current exceeds the set response value, the respective alarm LED lights up and the associated alarm relay switches after the expiry of the set response delay.

The alarm messages are stored. The alarm messages can be reset by pressing the reset button. The function of the device can be tested using the test button.



The currently measured value in per cent related to the set response value is indicated on the LED bar graph indicator. The CT circuit is continuously monitored. In case of wire breakage, the alarm relay switches and the Power On LED flashes.

### Standards and regulations

The residual current monitor RCMA471LY complies with the requirements of DIN EN 62020 (VDE 0663): 1999-07, IEC 62020: 2003-11.




Wiring diagram – system connection, external connections

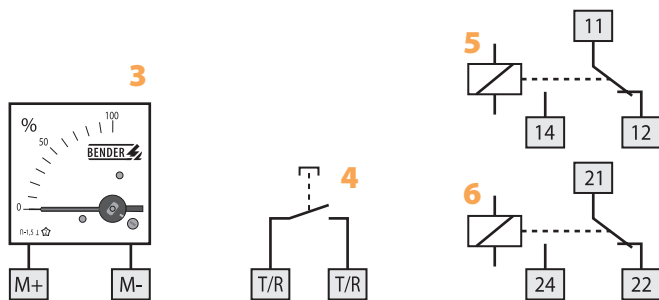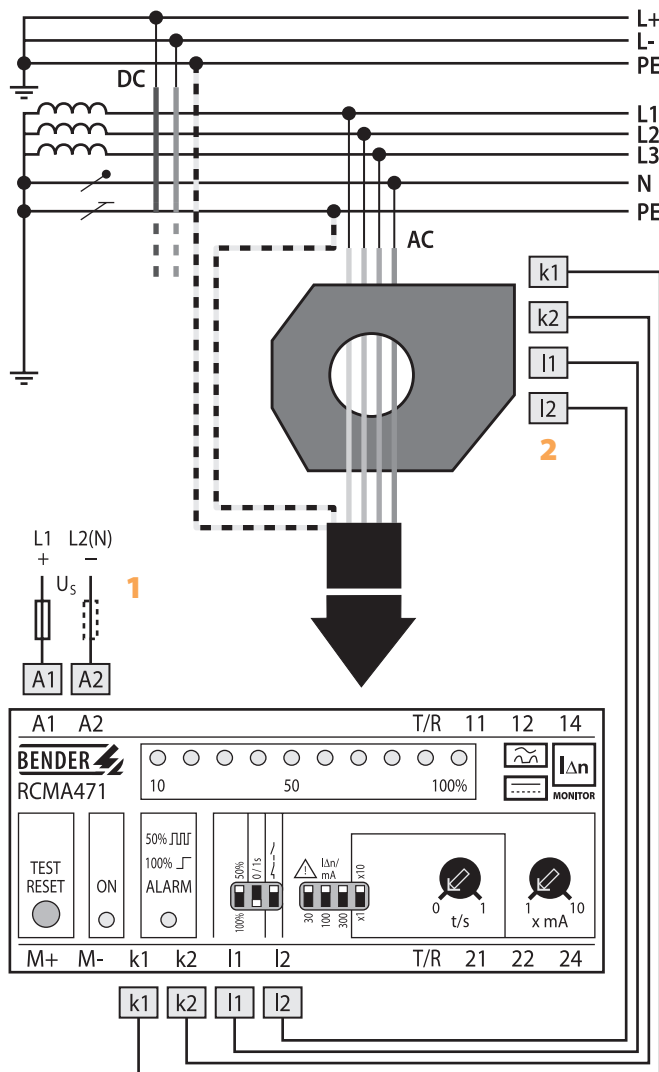

- 1 - Supply voltage  $U_s$  see ordering details, a 6 A fuse is recommended
- 2 - External measuring current transformer W...A...
- 3 - External measuring instrument
- 4 - External test and reset button
- 5 - Alarm relay: switches when the fault current exceeds the response value  $I_{\Delta n1}$  (alarm stage) and in case of CT interruption
- 6 - Alarm relay: switches when the fault current exceeds 50 % or 100 % of  $I_{\Delta n1}$

**Do not lead the PE conductor through the measuring current transformer !**

Wiring diagram – frontplate

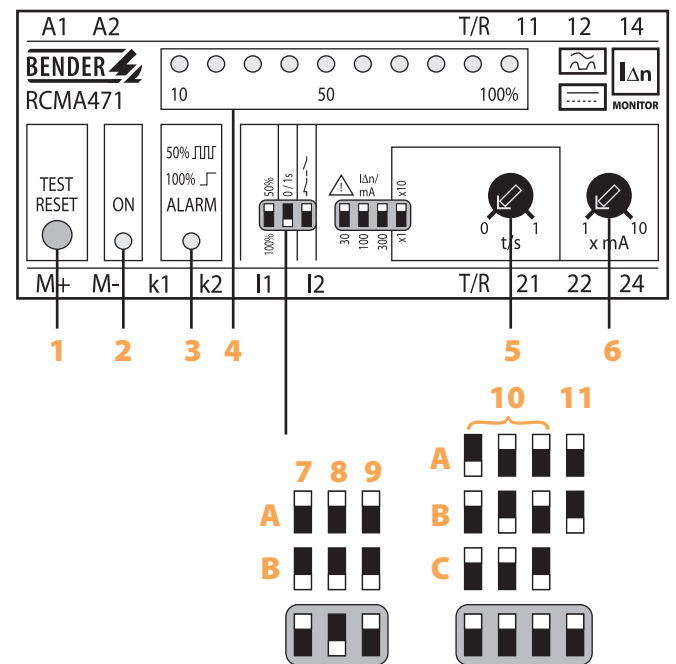

- 1 - Combined test and reset button: short-time pressing (< 1 s) = RESET; long-time pressing (> 2 s) = TEST
  - 2 - Power ON LED: lights up indicating that the device is in operation and flashes in case of interruption of the CT connection, defective CT or when the measuring range is exceeded.
  - 3 - Alarm LED: lights when the fault current exceeds the set response value and flashes when 50 % of the set response value are reached.
  - 4 - LED bar graph indicator, indicates the measured value in % related to the set response value
  - 5 - Potentiometer for setting the response delay (0...1 s)
  - 6 - Potentiometer for setting the response value  $I_{\Delta n}/mA \times 1...10$
- Response range DIP switch (white = switch position)

- 7 - Contact 21-22-24 (prewarning)
  - A - at 50 % of  $I_{\Delta n1}$
  - B - at 100 % of  $I_{\Delta n1}$
- 8 - Time delay prewarning
  - A - delay 1 s
  - B - delay 0 s
- 9 - Operating principle alarm relay
  - A - N/O operation
  - B - N/C operation
- 10 - Response range
  - A - 30 mA
  - B - 100 mA
  - C - 300 mA

} x 1 ... 10
- 11 - Response delay
  - A - setting  $t_{/s} \times 10$
  - B - setting  $t_{/s} \times 1$

## Technical data residual current monitor RCMA471LY

Insulation coordination acc. to IEC 60664-1:	
Rated voltage	AC 250 V
Rated impulse voltage / pollution degree	4 kV / 3
Voltage ranges	
Supply voltage $U_S$	see ordering details
Operating range of $U_S$ (AC)	0.85... 1.1 x $U_S$
Frequency range of $U_S$	DC / 50... 60 Hz
Power consumption	≤ 3.5 VA
Measuring circuit	
Type of external measuring current transformer	W-A... type B
Operating characteristics acc. to IEC 60755	type B
Rated residual operating current $I_{\Delta n2}$ (prewarning)	50 % / 100 % of $I_{\Delta n1}$
Response delay $t_v$	0 / 1 s
Rated residual operating current $I_{\Delta n1}$ (alarm)	30 / 100 / 300 mA... 3 A
Response delay $t_v$ , adjustable	0... 10 s
Rated frequency	0... 60 Hz
Relative percentage error	see table "conditions of operation"
Hysteresis	approx. 25 % of the response value
Response time $t_{an}$ at $I_{\Delta n1} = 5 \times I_{\Delta n1/2}$ ( $t_v = 0$ s)	< 40 ms
Response time $t_{an}$ at $I_{\Delta n1} = 1 \times I_{\Delta n1/2}$ ( $t_v = 0$ s)	< 70 ms
Displays and LEDs	
LED bar graph indicator	0... 100 %
LEDs	Power On, prewarning, alarm
Inputs / outputs	
Test / reset button	internal, external
Cable length test / reset button	≤ 10 m
Current output measuring instrument 0... 100 %	DC 0... 400 $\mu$ A
Load	≤ 12.5 k $\Omega$
Connection to CT: single wire 4 x 0.75 mm <sup>2</sup>	0... 10 m
Switching elements	
Switching elements	2 changeover contacts "alarm" and "prewarning"
Operating principle	N/C / N/O operation
Electrical endurance, number of cycles	12000
Rated contact voltage	AC 250 V / DC 300 V
Limited making capacity	AC / DC 5 A
Limited breaking capacity	2 A, AC 230 V, cos phi = 0.4 0.2 A, DC 220 V, L / R = 0.04 s
Fault memory behaviour	automatic fault storage
General data	
EMC immunity	acc. to EN 61543
EMC emission	acc. to EN 61000-6-4
Shock resistance IEC 60068-2-29 (device in operation)	15 g / 11 ms
Bumping IEC 60068-2-27 (during transport)	40 g / 6 ms
Vibration resistance IEC 60068-2-6 (device in operation)	1 g / 10... 150 Hz
Vibration resistance IEC 60068-2-6 (device out of operation)	2 g / 10... 150 Hz
Ambient temperature (during operation)	-25 °C... +70 °C
Storage temperature range	-40 °C... +75 °C
Climatic category DIN IEC 60721-3-3	3K5
Operating mode	continuous operation
Position	any position
Connection	screw terminals
Cross sectional area of connecting cable	
Rigid, flexible	0.2... 4 mm <sup>2</sup> / 0.2... 2.5 mm <sup>2</sup>
Flexible with ferrules without / with plastic collar	0.25... 2.5 mm <sup>2</sup>
Conductor sizes (AWG)	24-12
Degree of protection DIN EN 60529	
Internal components	IP 30
Terminals	IP 20
Type of enclosure	X470
Enclosure, material	polycarbonate
Screw fixing	2 x M4
DIN rail mounting acc. to	DIN EN 60715 / IEC 60715
Installation into standard distribution panels acc. to	DIN 43871
Flammability class	UL94V-0
Instruction leaflet	404002
Weight	approx. 350 g

## Ordering details

Type	Response range $I_{\Delta n}$	Rated frequency	Time delay	Measuring current	Indication	Fault storage behaviour	Supply voltage $U_S$	Art. No.
RCMA471LY	30/100/300 mA... 3 A	0... 60 Hz	0... 10 s	W3-A105S, W4-A140S, W5-A210S	internal/ external	automatic fault storage	AC 230 V	B 9404 2005 <sup>2)</sup>
RCMA471LY-13	30/100/300 mA... 3 A	0... 60 Hz	0... 10 s	W3-A105S, W4-A140S, W5-A210S	internal/ external	automatic fault storage	AC 90... 132 V*	B 9404 2006 <sup>2)</sup>
RCMA471LY-21	30/100/300 mA... 3 A	0... 60 Hz	0... 10 s	W3-A105S, W4-A140S, W5-A210S	internal/ external	automatic fault storage	DC 9.6... 84 V*	B 9404 2010 <sup>1)</sup>
RCMA471LY-23	30/100/300 mA... 3 A	0... 60 Hz	0... 10 s	W3-A105S, W4-A140S, W5-A210S	internal/ external	automatic fault storage	DC 77... 286 V*	B 9404 2011 <sup>1)</sup>

Other supply voltages on request

<sup>1)</sup> For industrial applications only

\* absolute values of the operating range

<sup>2)</sup> For industrial and household applications

**Accessories**

**External measuring current transformers**

Type	Internal diameter (mm)	$I_{\Delta n}$	Art. No.
W3-A105S	∅ 105	≥ 30 mA	B 911 745
W4-A140S	∅ 140	≥ 100 mA	B 911 747
W5-A210S	∅ 210	≥ 300 mA	B 911 748






**External measuring instrument**

Type	Indication	Size (mm)	Art. No.
9604-4241	0...100%	96 x 96	B 986 807


**Measuring transducer**

Type	Input	Output	Art. No.
RK170	0...400 μA	0...10 V / 0/4 ... 20 mA	B 9804 1500

**Conditions of operation according to IEC 62020, IEC 60755 amendment 2, type B**

Type of current	Wave form	Tripping currents
Alternating currents (50 Hz)		$0.5...1 \times I_{\Delta n}$
Residual pulsating direct currents (positive and negative half waves) half-wave current		$0.5...1.4 \times I_{\Delta n}$
Phase-controlled half-wave currents Current delay angle $90^\circ$ el / $135^\circ$ el		$0.5...1.4 \times I_{\Delta n}$
Half-wave current superimposed by a smooth direct current of 6 mA		$0.5...1.4 \times I_{\Delta n}$
Smooth DC residual current		$0.5...2 \times I_{\Delta n}$

**Dimension diagram, enclosure X470**

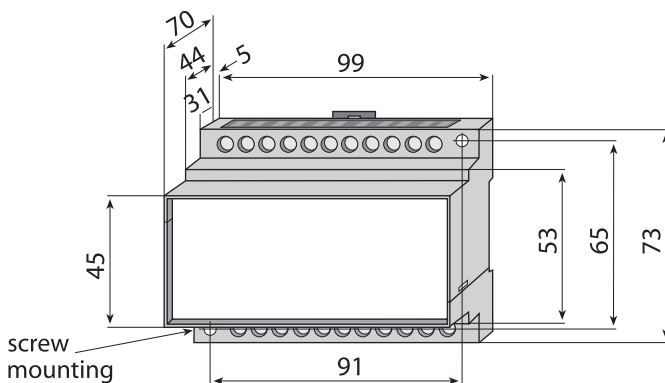

Dimensions in mm