

FLEXIBLE ELEMENTS



CONCEPT and DESIGN:

The BEVING flexible elements are manufactured with an assembly of copper strips (Cu ETP), protected by a PVC extrusion which offers an electrical insulation as well the flexible element is twisted or used in different environments (humidity, high temperature or aggressive ambience).

**100 % EXTRUDED
NEW PVC UL APPROVED**

THE RANGE:

Standard Length: 2000 mm and 3000 mm (other dimensions upon request).
Strip thickness: 0.5 mm up to 1 mm.
Number of strips: 2 up to 12.

Options: Tinned copper or aluminium.
Flexible connections.
Halogen free.
High temperature insulation – 125 °C.

SCOPE OF APPLICATION:

- All application linked to power transportation, to replace: Cables, Rigid bars
- Electrical appliances (Switchboard, Circuit breaker and converter).
- Transformer (connections between the transformer and the bars).

ADVANTAGES:

The sole electrical connection system which compiles all duties: shaping – connectors – conductor insulation and insulated support.
The manufacturing cost of the connection is reduced by using a sole component compared to the price of cables + supports + connectors.

With reference to rigid bars:

Increasing of electrical performance with improvement of safety (higher current density with insulation for a same section of copper).
Gain of volume by closeness implantation of insulated flexible elements.
Easy shaping thanks to the flexibility of the strips in comparison with rigid bars.

With reference to cables:

Time saving by the simplicity of connection manufacturing using no added connectors.
Suppression of the contact resistance between the cable and the connector.
Gain of volume with the folding in comparison with the compulsory curvature of a cable.
Suppression of the supports or glands.

TECHNICAL CHARACTERISTICS:

PVC - POLYVINYLCHLORIDE

Density:	1.31	NFT 51-063	Calorimetric conductivity: 3 to 4 10 ⁻⁴ cal/s/cm/°C
Hardness Shore:	85 A	NFT 51-109	Dielectric strength: 20 KV/mm
Maximum tensile strength:	19.6MPa	NFT 51-034	Fire request: Class FV 0 ep: 2 mm UL 94v0
Maximum elongation:	365 %	NFT 51-034	Recycling: Yes

STRIPS

Copper classification: Compliance with NF A 51-050	- Designation: - Mini copper: - Resistivity maximum at 20°C	Cu-ETP state 0 99.9 % 1.7241 µW.cm (100% ACS)
Copper characteristics: Compliance with NF A 51-100 (exception vickers hardness)	- Tensile strength: - Elongation: - Vickers hardness:	200 MPa minimum 30 % minimum < 55 HV

FLEXIBLE ELEMENTS


Maximum voltages:	1000 Volts	
Operating temperature:	-40°C to +105°C	
PVC thickness:	2.0mm	
Dielectric strength:	Average of 20 KV/mm	Compliance to NFC 32-201-1
Fire reaction:		Compliance to NFC 32-070 C2

DESIGNATION

ES	24	X	1	X	8
Flexible element	Width strip(mm)		thickness strip(mm)		quantity strip


Allowable current in relation to the flexible elements overheating for an ambient temperature of 35°C



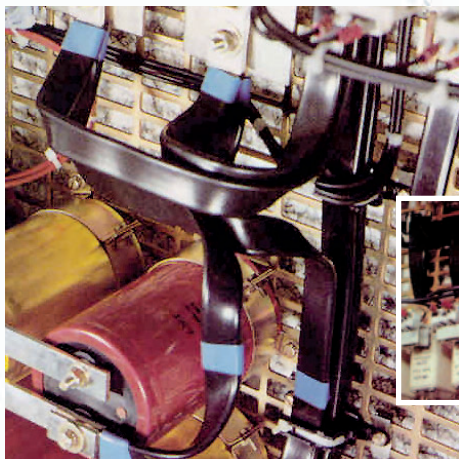

SHAPING:

1. Cut the total length of the flexible element + 50 mm for the shaping.
2. Shaped the element:
That operation must be done before the final cutting, the stripping and the punching.
3. Stripping:
The stripping must be done with a knife or a stripper.
4. Punching or drilling
Punching or drilling used to create a bump. To guarantee a correct contact between the clamp and the flexible element, please make sure that you punch or drill from the surface on contact with the clamp.
5. Assembling:
Use a washer under the head of bolt to apply a pressure on the width of the flexible element.
For flexible elements made with more than 4 strips, use « BELLEVILLE » washer plus iron bolt.
Otherwise, use a bolt coated with zinc.

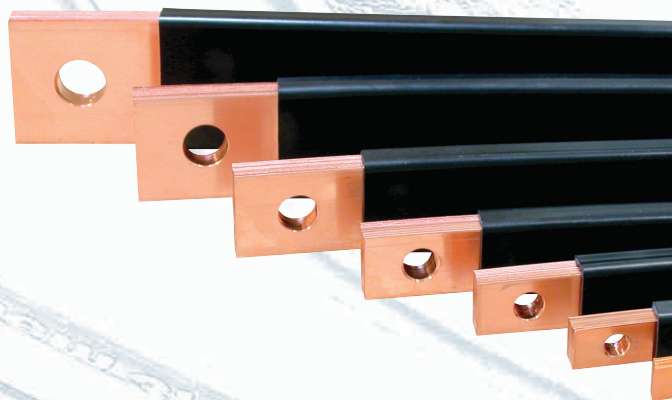

Beving Elektronik AB

Box 93 SE-127 22 Skärholmen
Storsätragränd 10 SE-127 39 Skärholmen

Tel. +46 (0)8 680 11 99 - Fax. +46 (0)8 680 11 88